




**FEATURES**

- Fast response and low deflection
- Notable Nonlinearity
- Auto Recognition of calibration data (TEDS IEEE 1451.4)
- For use in both tension and compression


SPECIFICATIONS	
PERFORMANCE	
Nonlinearity	±0.2% of RO
Hysteresis	±0.2% of RO
Nonrepeatability	±0.1% of RO
ELECTRICAL	
Rated Output (RO)	2 mV/V nom
Excitation (VDC or VAC)	18 max
Bridge Resistance	350 Ohm nom
Insulation Resistance	≥500 MOhm @ 50 VDC
Connection	6 Pin Bendix Receptacle, PT02A-10-6P w/ Auto Recognition Chip
Connector Code	CC1T
MECHANICAL	
Weight (approximate)	3.1 lb [1.4 kg]
Safe Overload	150% of RO
Deflection	0.005 in [0.13 mm] nom
Material (flexure)	17-4 PH stainless-steel
IP Rating	IP64
TEMPERATURE	
Operating Temperature	-45 to 200°F (-42 to 93°C)
Compensated Temperature	60 to 160°F (15 to 72°C)
Temperature Shift Zero	±0.005% of RO/°F (0.01% of RO/°C)
Temperature Shift Span	±0.005% of Load/°F (0.01% of Load/°C)
CALIBRATION	
Calibration Test Excitation	10 VDC
Calibration (standard)	5-pt Tension
Calibration (available)	Compression
Shunt Calibration Value	60.4 kOhm

**DIMENSIONS** inches [mm]

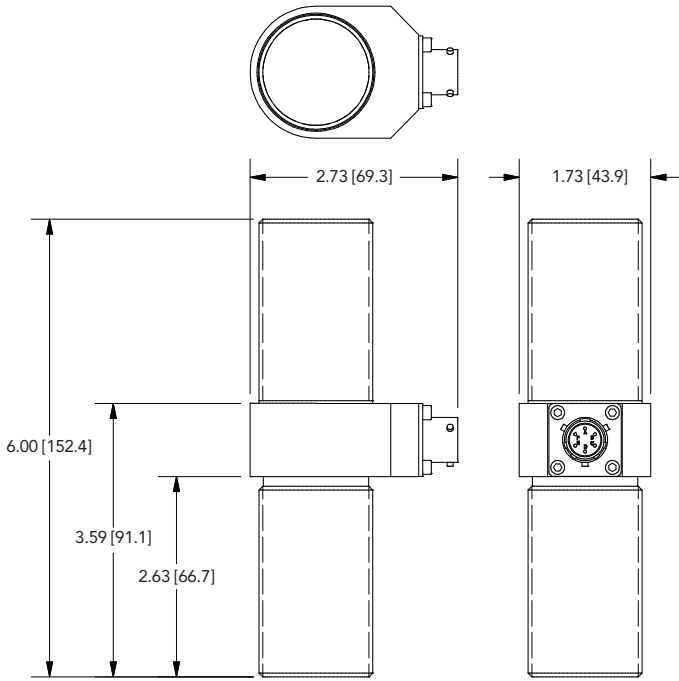

**BENDIX 6-PIN**

PIN	COLOR	TEDS DESCRIPTION
A	Red	+ Excitation
B	Black	- Excitation
C	Green	+ Signal
D	White	- Signal
E	Orange	TEDS Data
F	Blue	TEDS Ground



Sensor Receptacle View

**CAPACITIES**

ITEM #	klb	kN	Thread	Natural Frequency (kHz)
FSH01957	50	222.4	1 1/2-12	8.1
FSH03779	50	222.4	M36x4	8.1



Drawing Number: FI1504

FUTEK reserves the right to modify its design and specifications without notice. Please visit [www.futek.com/salesterms](http://www.futek.com/salesterms) for complete terms and conditions.

10 Thomas, Irvine, CA 92618 USA

Tel: (949) 465-0900

Fax: (949) 465-0905

[www.futek.com](http://www.futek.com)



U.S. Manufacturer