

## Terms and Conditions of Use

This drawing, including all information depicted herein (collectively, "Drawing"), is FUTEK's property and protected under applicable law, including copyright. FUTEK reserves all rights. The Drawing is provided solely for your information and exclusive use. **Except as expressly approved by FUTEK in writing, you may not reproduce or share this Drawing**, in whole or part, with any other firm or individual, or attempt to reverse engineer the Drawing or data contained therein. Any reproduction of this Drawing in whole or part must include this legend.

By accessing the Drawing, you agree that you have read, understand, and agree to abide by the stated Terms and Conditions of Use.

© 2023 FUTEK Advanced Sensor Technology, Inc.




# FUTEK MODEL LCM300

## Tension and Compression Load Cell w/ 4 Pin Lemo

ITEM NUMBER: FSH03933



INCH [mm]		R.O.= Rated Output	
CONNECTOR CODE (CC4)			
+ Excitation	- Excitation	+ Signal	- Signal
RED	BLACK	GREEN	WHITE
1	4	2	3
Shield			
FLOATING			

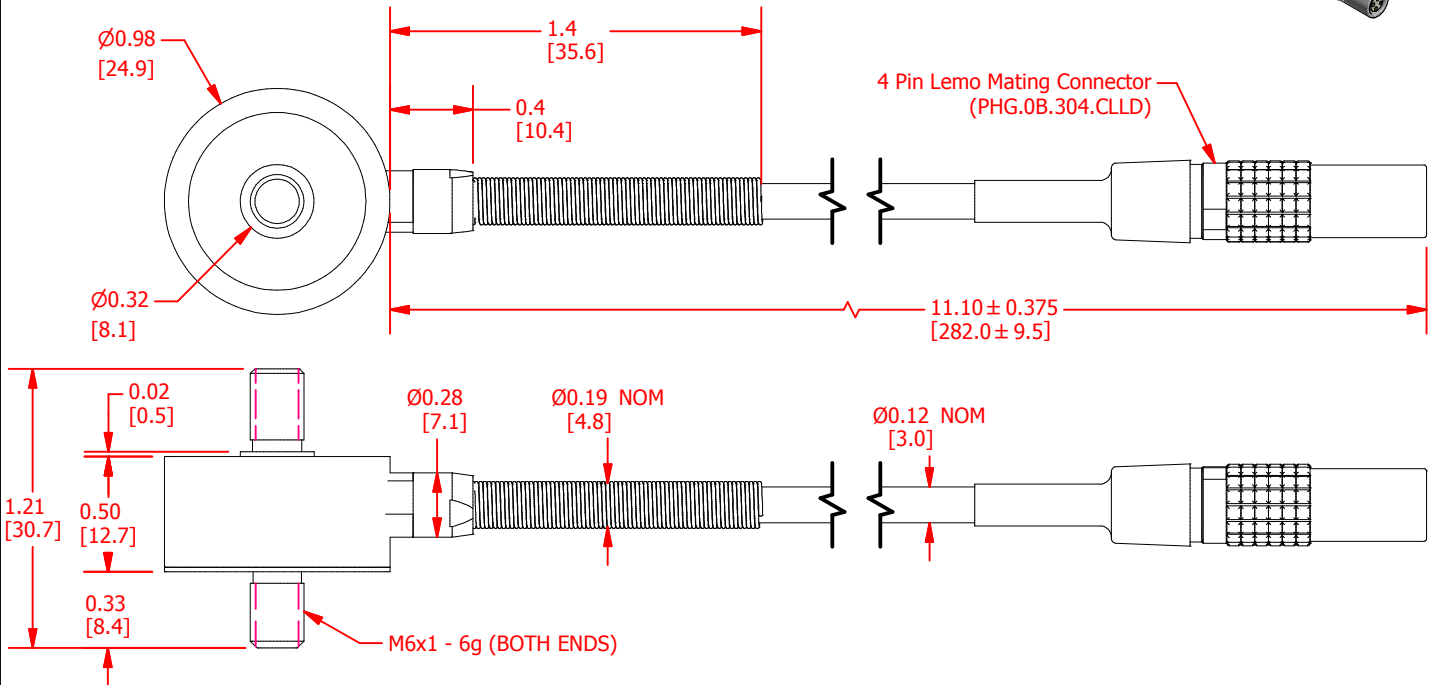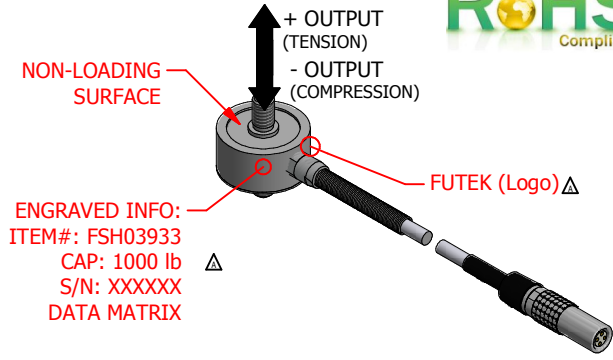

### SPECIFICATIONS:

RATED OUTPUT	2 mV/V nom.
CAPACITY	1000 lb [4.448 kN]
SAFE OVERLOAD	150% of R.O.
ZERO BALANCE	±3% of R.O.
EXCITATION (VDC OR VAC)	15 MAX
BRIDGE RESISTANCE	700 Ω nom
NONLINEARITY	±0.5% of R.O.
HYSTERESIS	±0.5% of R.O.
NONREPEATABILITY	±0.1% of R.O.
TEMP. SHIFT ZERO	±0.005% of R.O./°F (±0.009 of R.O./°C)
TEMP. SHIFT SPAN	±0.02% of LOAD/°F (±0.036 of LOAD/°C)
COMPENSATED TEMP.	60 to 160 °F (16 to 71 °C)
OPERATING TEMP	-45 to 200 °F (-43 to 93 °C)
WEIGHT (approx)	0.3 lb
MATERIAL	17-4ph S.S. Flexure
CABLE:	#28 Awg, 4 Conductor Braided Shielded PVC Cable, w/4 Pin Lemo Mating Connector (PHG.0B.304.CLLD)
COMPLIANCES	RoHS 2011/65/EU

CUSTOMER APPROVAL- COMPANY:

## OUTLINE DRAWING

# FUTEK

This drawing, including all information depicted herein (collectively, "Drawing"), is FUTEK's property and protected under applicable law, including copyright. FUTEK reserves all rights. The Drawing is provided solely for your information and exclusive use. Except as expressly approved by FUTEK in writing, you may not reproduce or share this Drawing, in whole or part, with any other firm or individual, or attempt to reverse engineer the Drawing or data contained therein. Any reproduction of this Drawing in whole or part must include this legend.

CUSTOMER APPROVAL- NAME / DATE:

STANDARD NOTES: (Unless Otherwise Specified)


REVISIONS: (Refer to dwg # revision sheet)

ALL DIMENSIONS ARE IN INCHES  
DRAWING INTERPRETATION DIMS. PER ASME-Y14.5M  
REMOVE BURRS AND BREAK SHARP EDGES .005 - .015  
THREADS PER HANDBOOK H-28  
DIMENSIONS ARE SHOWN AFTER PLATING

ANGLE:  
± 1/2°

CHAMFER:  
± 5°

TOLENANCE:  
.X ± 0.1"  
.XX ± 0.01"  
.XXX ± 0.005"



MODEL: **LCM300**

DWG No.: **FO1343-A**

DRAWN BY: *E. Pano*

CREATED DATE: *3/27/2013*

APPROVED BY: *R. Walker*

APPROVED DATE: *4/11/2013*

CHECKED BY:

CAGE: 1X8M6 SHEET: 1 OF 1

A	12/22/2015
---	------------