

FUTEK MODEL QIA128


Miniaturized Integrable Sampling System

DRAWING NUMBER: FI1519-A

INCH [mm] | R.O.= Rated Output

Item #: QSH02084

	Castellated Hole Pin Number	Pin Function	Input/Output Connector Pin Number
JTAG	1	RESET	NA
	2	TMS	NA
UART	3	TX	7
	4	RX	6
SENSOR	5	GND	1
	6	-EXCITATION	2
	7	-SIGNAL	5
	8	+EXCITATION	3
	9	+SIGNAL	4
	10	VIN	9
SPI	11	CS	14
	12	SCLK	13
	13	MISO	12
	14	MOSI	11
	15	DRDY	10
JTAG	16	VDD	8
	17	NTRST	NA
	18	TDO	NA
	19	TDI	NA
	20	TCK	NA

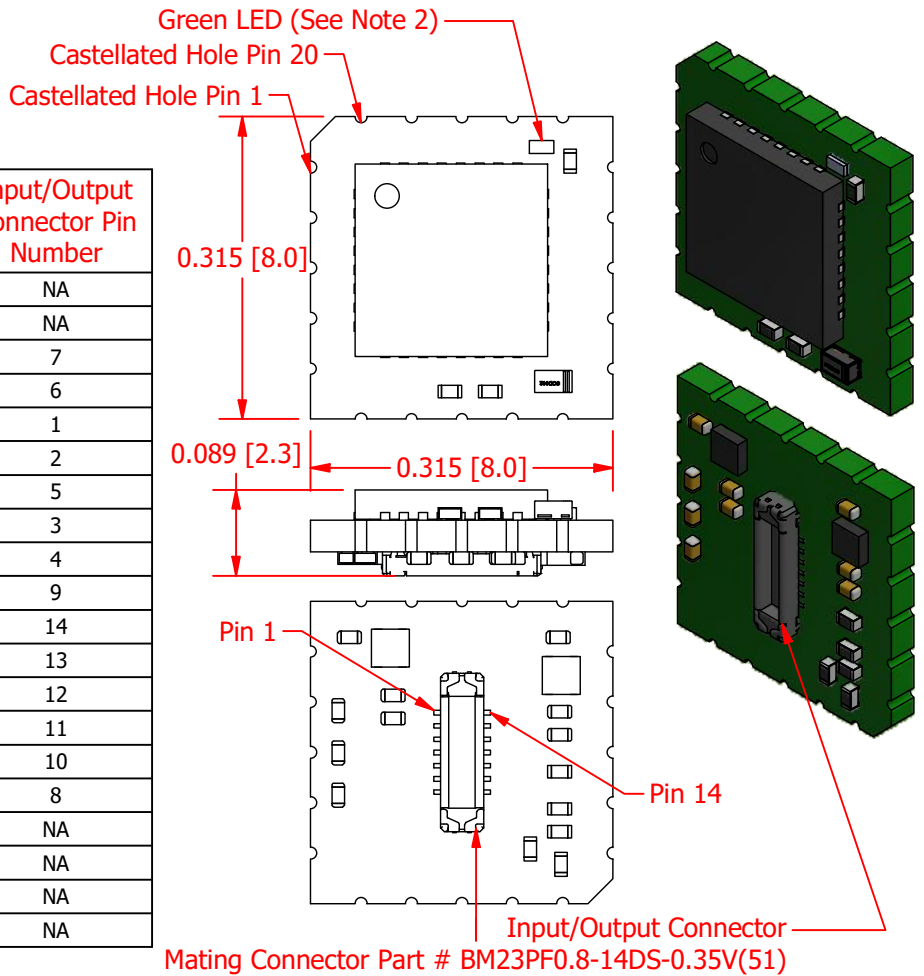

Noise Free Resolution (See Note 1)									
Range (mV/V)	GAIN	4 SPS	20 SPS	50 SPS	100 SPS	200 SPS	500 SPS	850 SPS	1300 SPS
240-480	1	18.4	17.7	16.7	16.3	15.8	15.2	14.6	14.2
120-240	2	17.1	16.8	15.8	15.3	14.9	14.2	13.9	13.3
60-120	4	16.9	16.7	16.5	16.3	16.0	15.0	14.9	14.1
30-60	8	16.8	16.4	16.3	16.1	15.6	15.1	14.8	13.8
15-30	16	16.7	16.3	16.2	16.0	15.5	15.2	14.7	13.7
7.5-15	32	16.6	16.2	16.1	15.9	14.9	14.7	14.6	13.5
3.7-7.5	64	16.5	16.1	16.0	15.8	15.7	15.2	14.5	13.4
1.8-3.7	128	16.1	15.6	15.5	15.1	14.7	14.0	13.8	13.2
0.9-1.8	256	15.1	14.7	14.1	13.5	13.3	13.1	12.6	12.2
0-0.9	512	14.0	13.6	13.5	13.1	12.8	12.1	11.8	11.4

Specifications:

Input:

- Type: Differential
- Excitation: 2.5 VDC
- Bridge Resistance: 350 Ω to 5000 Ω
- Input Range: Up to 480 mV/V

Power:

- 3 VDC to 5 VDC
 - 20-40mV peak-to-peak ripple in passband
 - 20MHz bandwidth (cutoff 40dB @ 20MHz)
- Power Consumption: 60 mW

SPI Output:

- Voltage: 1.8 VDC (compatible with 3.3 VDC) Operating Temperature: -40°F to 185°F (-40°C to 85°C)

Note 1: Noise Free Resolution is calculated using upper limit of 'Range(mV/V)' or 'maximum dynamic range'

Note 2: Solid green LED indicates normal operation mode

FUTEK
ADVANCED SENSOR TECHNOLOGY, INC.

This drawing is submitted solely for the information and exclusive use of the original addressee. It is not to be divulged in whole or in part, by any firm or individual without written permission from FUTEK

10 THOMAS
IRVINE, CA 92618 USA
+1 (949) 465-0900

INTERNET:
<http://www.futek.com>
SHEET 1 OF 1