



FUTEK MODEL QLA376

ITEM NUMBER: QSH01708

DUAL CHANNEL PARALLELOGRAM LOAD CELL W/ OVERLOAD PROTECTION AND INLINE AMPLIFIERS




INCH [mm] R.O.= Rated Output		
WIRING CODE (CC1C)		
Power Supply (+)	Ground(-)	Voltage Output (+)
RED	BLACK	Green

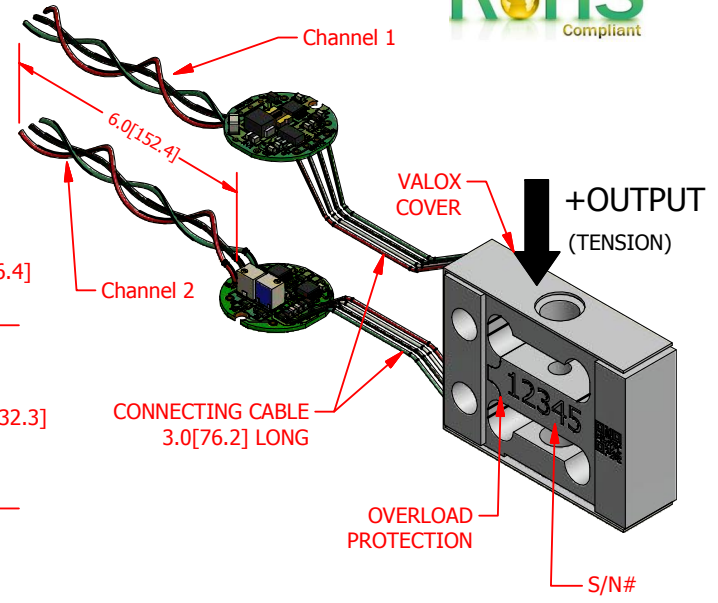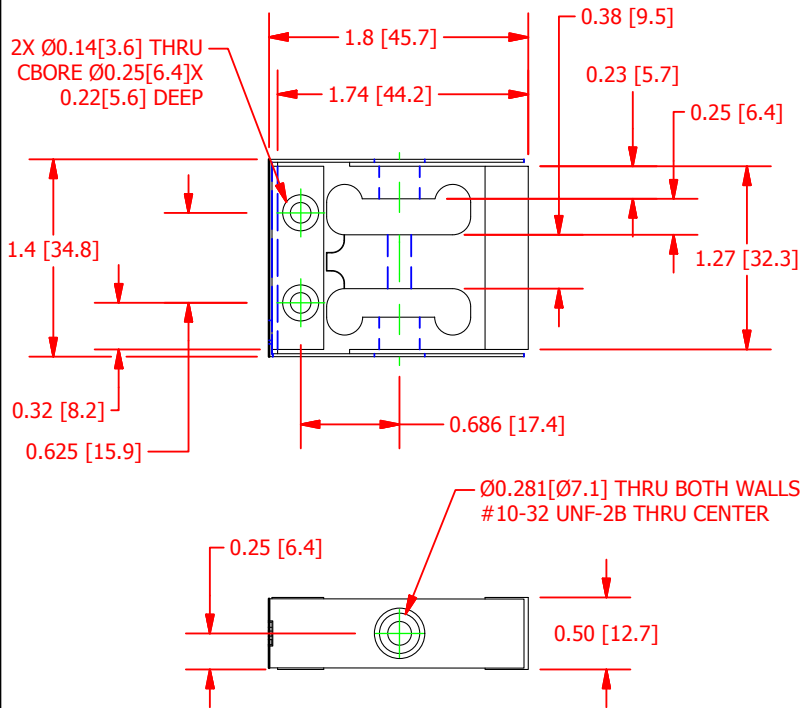

SPECIFICATIONS

RATED OUTPUT	8 VDC
CAPACITY	15 lb [0.067kN]
SAFE OVERLOAD	250 lb
ZERO BALANCE	1 VDC
EXCITATION	12-24 VDC MAX
NONLINEARITY	±0.075 of R.O.
HYSTERESIS	±0.075 of R.O.
NONREPEATABILITY	±0.05 of R.O.
TEMP. SHIFT ZERO	±0.007 of R.O./°F (±0.013 of R.O./°C)
TEMP. SHIFT SPAN	±0.007 of LOAD/°F (±0.013 of LOAD/°C)
COMPENSATED TEMP.	60 to 160 °F (15.56 to 71.11 °C)
OPERATING TEMP	-40 to 185 °F (-40 to 85 °C)
WEIGHT (approx)	0.2 lb
MATERIAL	Aluminum
CABLE (From Load Cell to Amplifier)	#29 AWG, 4 Conductor, Spiral Teflon Cable
CABLE (From Amplifier)	#26 AWG, 4 Conductor, Spiral Teflon Cable

IVA100 AMPLIFIER DETAIL

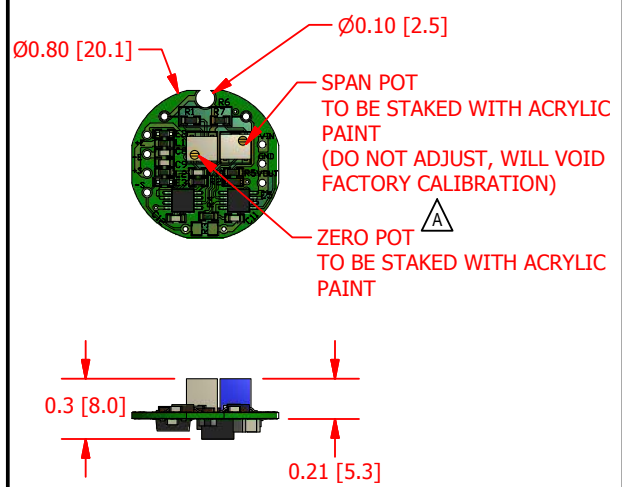

CUSTOMER APPROVAL- COMPANY:

OUTLINE DRAWING

This drawing is submitted solely for the information and exclusive use of the original addressee. It is not to be divulged in whole or in part, by any firm or individual without written permission from:



CUSTOMER APPROVAL- NAME / DATE:

STANDARD NOTES: (Unless Otherwise Specified)
 ALL DIMENSIONS ARE IN INCHES
 DRAWING INTERPRETATION DIMS. PER ASME-Y14.5M
 REMOVE BURRS AND BREAK SHARP EDGES .005 - .015
 THREADS PER HANDBOOK H-28
 DIMENSIONS ARE SHOWN AFTER PLATING

MODEL: **QLA376** DWG No.: **FO1357-B**

REVISIONS: (Refer to dwg # revision sheet)

A	12/12/2013
B	12/16/2013

ANGLE: ± 1/2°
 CHAMFER: ± 5°
 TOLERANCE:
 .X ± 0.1"
 .XX ± 0.01"
 .XXX ± 0.005"

DRAWN BY: E. Pano CREATED DATE: 8/26/2013

APPROVED BY: R. Walker APPROVED DATE: 12/4/2013

CHECKED BY: CAGE: 1X8M6 SHEET: 1 OF 1

