

Terms and Conditions of Use

This drawing, including all information depicted herein (collectively, "Drawing"), is FUTEK's property and protected under applicable law, including copyright. FUTEK reserves all rights. The Drawing is provided solely for your information and exclusive use. **Except as expressly approved by FUTEK in writing, you may not reproduce or share this Drawing**, in whole or part, with any other firm or individual, or attempt to reverse engineer the Drawing or data contained therein. Any reproduction of this Drawing in whole or part must include this legend.

By accessing the Drawing, you agree that you have read, understand, and agree to abide by the stated Terms and Conditions of Use.

© 2023 FUTEK Advanced Sensor Technology, Inc.


FUTEK MODEL QMA141

Custom High Temperature, Tri Axial Sensor

ITEM NUMBER: QSH01877

INCH [mm] | R.O. = Rated Output

| WIRING CODE | | | |
|--------------|----------------|----------------|----------------|
| + Excitation | - Excitation | + Signal | - Signal |
| RED PIN 1 | BLACK PIN 3 | GREEN PIN 4 | WHITE PIN 5 |

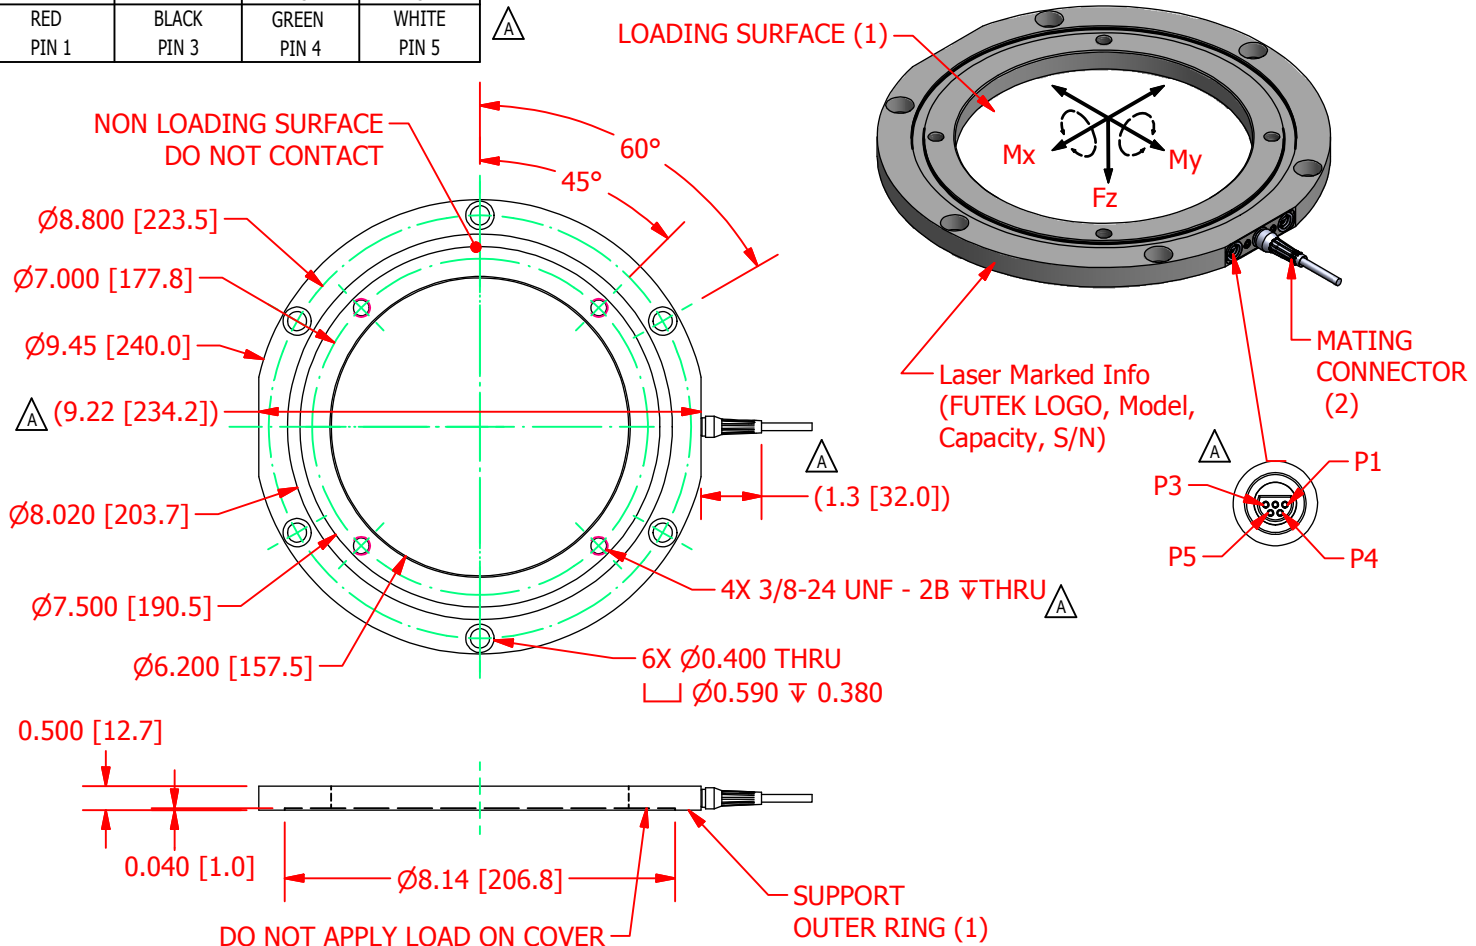

SPECIFICATIONS:

| | |
|-------------------------|--|
| RATED OUTPUT | 1 mV/V nom (Fz), 0.5 mV/V nom (Mx, My) |
| CAPACITY | 6000 lb (Fz), 6000 in-lb (Mx, My) |
| SAFE OVERLOAD | 300 % of R.O. |
| EXCITATION (VDC OR VAC) | 10 Max |
| BRIDGE RESISTANCE | 700 Ohm (Fz), 350 Ohm (Mx, My) |
| NONLINEARITY | ±1% of R.O. (Fz), ±2% of R.O. (Mx, My) |
| NONREPEATABILITY | ±0.5% of R.O. |
| TEMP. SHIFT ZERO | ±0.01% of R.O./°F (±0.018 of R.O./°C) |
| TEMP. SHIFT SPAN | ±0.02% of LOAD/°F (±0.036 of LOAD/°C) |
| COMPENSATED TEMP. | 60 to 250 °F (16 to 121 °C) |
| OPERATING TEMP | 0 to 350 °F (-18 to 177 °C) |
| MATERIAL | 17-4 PH S.S. |
| DEFLECTION | 0.0005 [0.013] nom. |

3x CONNECTOR: 4 Socket High Temperature, Environmentally Sealed when mated to Mating Connector.

NOTES:

- FOR OPTIMAL PERFORMANCE CUSTOMER MATING SURFACES TO BE FLAT WITHIN 0.0005" [0.013]
- QSH01893 MATING CONNECTOR WITH 15 FT CABLE SOLD SEPERATELY.

CUSTOMER APPROVAL- COMPANY:

CUSTOMER APPROVAL- NAME / DATE:

REVISIONS: (Refer to dwg # revision sheet)

| A | 2-3-17 |
|---|--------|
| | |

OUTLINE DRAWING

STANDARD NOTES: (Unless Otherwise Specified)

ALL DIMENSIONS ARE IN INCHES
DRAWING INTERPRETATION DIMS. PER ASME-Y14.5M
REMOVE BURRS AND BREAK SHARP EDGES .005 - .015
THREADS PER HANDBOOK H-28
DIMENSIONS ARE SHOWN AFTER PLATING

ANGLE:
± 1/2°

CHAMFER:
± 5°

3rd ANGLE PROJ.
TOLERANCE:
.X ± 0.1"
.XX ± 0.01"
.XXX ± 0.005"



FUTEK

This drawing, including all information depicted herein (collectively, "Drawing"), is FUTEK's property and protected under applicable law, including copyright. FUTEK reserves all rights. The Drawing is provided solely for your information and exclusive use. Except as expressly approved by FUTEK in writing, you may not reproduce or share this Drawing in whole or part, with any other firm or individual, or attempt to reverse engineer the Drawing or data contained therein. Any reproduction of this Drawing in whole or part must include this legend.

| | |
|------------------------|---------------------------|
| MODEL: QMA141 | DWG No.: FO1438 |
| DRAWN BY: R. Walker | CREATED DATE: 12/14/2016 |
| APPROVED BY: J. Vargas | APPROVED DATE: 12/16/2016 |
| CHECKED BY: | CAGE: 1X8M6 SHEET: 1 OF 1 |