



FUTEK MODEL LSM300 LEAD FREE LSM300 w/ FCI CONNECTOR

ITEM NUMBER: QSH01784



INCH (mm) | R.O. = Rated Output

WIRING CODE			
+Excitation	-Excitation	+Signal	-Signal
GREEN PIN '1'	BLACK PIN '4'	WHITE PIN '2'	RED PIN '3'
GROUND FLOATING PIN '5'			

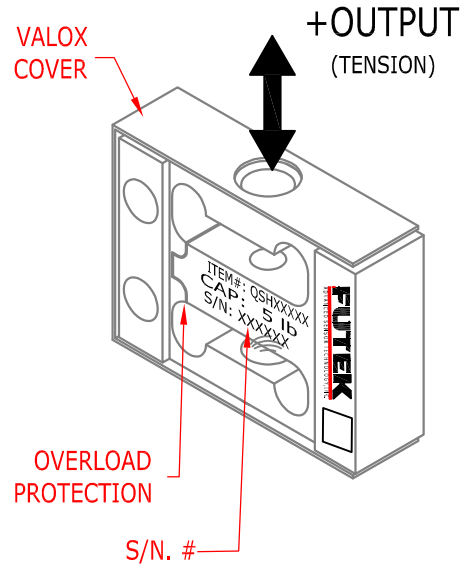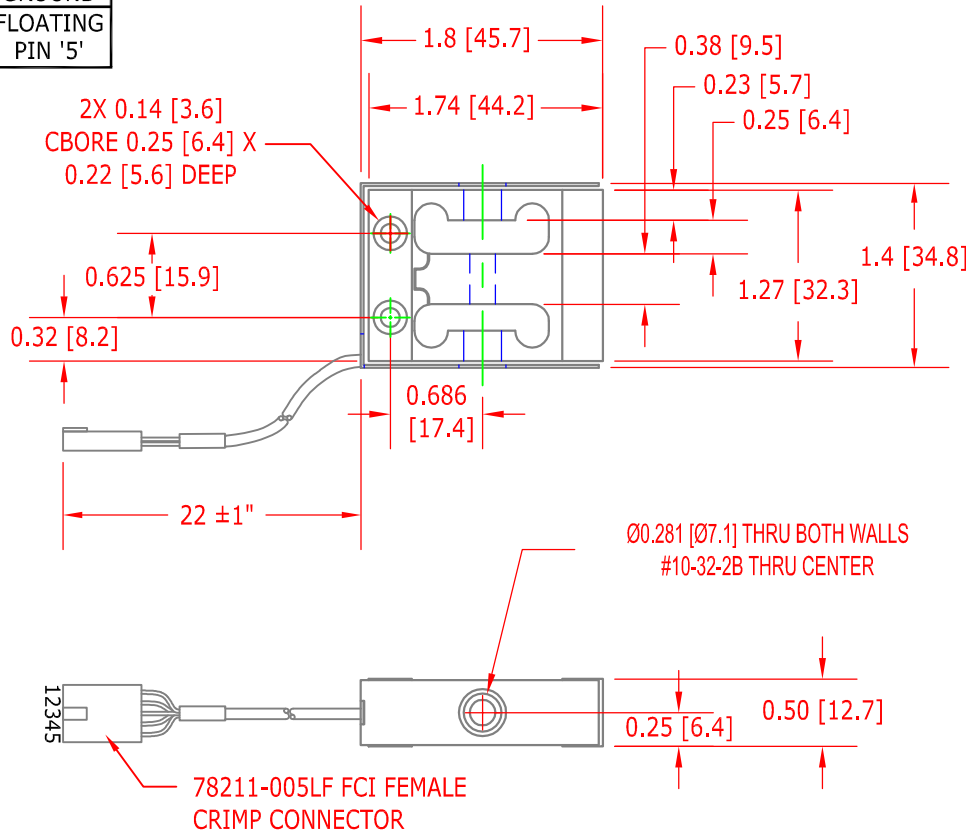

SPECIFICATIONS:

RATED OUTPUT	2 mV/V nom.
CAPACITY	5 lb
SAFE OVERLOAD	250 lb
ZERO BALANCE	±3% of R.O.
EXCITATION (VDC OR VAC)	18 MAX
BRIDGE RESISTANCE	1000 Ω nom.
NONLINEARITY	±0.02% of R.O.
HYSTERESIS	±0.02% of R.O.
NONREPEATABILITY	±0.02% of R.O.
CREEP	±0.025% of LOAD.
TEMP. SHIFT ZERO	±0.005% of R.O./°F [0.01% of R.O./°C]
TEMP. SHIFT SPAN	±0.005% of LOAD/°F [0.01% of LOAD/°C]
COMPENSATED TEMP.	60 to 160°F [15 to 72°C]
OPERATING TEMP.	-60 to 200°F [-50 to 93°C]
WEIGHT	1 oz [28 g]
MATERIAL	ALUMINUM
CABLE: #29 AWG, 4 Conductor, Spiral Shielded Silicone Cable	
RoHS LEAD FREE	YES
ISO13485 COMPLIANCE	YES
CE COMPLIANCE	EN55011:2009 EN 61326-1:2006

OUTLINE DRAWING

MATERIAL:	—
HEAT TREATMENT - FINISH:	—
REVISIONS: (Refer to dwg # revision sheet)	

- STANDARD NOTES: (Unless Otherwise Specified)
- ALL DIMENSIONS ARE IN INCHES
 - DRAWING INTERPRETATION DIMS. PER ASME-Y14.5M
 - REMOVE BURRS AND BREAK SHARP EDGES .005 - .015
 - THREADS PER HANDBOOK H-28
 - DIMENSIONS ARE SHOWN AFTER PLATING



ANGLE:

±1/2°

CHAMFER:

±5°

TOLERANCE:

.X ±0.1

.XX ±0.01

.XXX ±0.005

This drawing is submitted solely for the information and exclusive use of the original addressee. It is not to be divulged in whole or in part, by any firm or individual without written permission from:

FUTEK

ADVANCED SENSOR TECHNOLOGY, INC.

10 THOMAS

IRVINE, CA 92618 USA

Phone: (949) 465-0900

Fax: (949) 465-0905

CAGE: 1X8M6

MODEL: **LSM300**

DWG No.: **FO1386**

DRAWN BY: E. Pano

CHECKED BY: -

APPROVED BY: R. Walker

DATE: **Feb, 26 2015**