


FUTEK MODEL QLA383-TPS

Low Profile Portable Calibration Tripod

ITEM NUMBER: TPS01020

INCH [mm] | R.O.= Rated Output

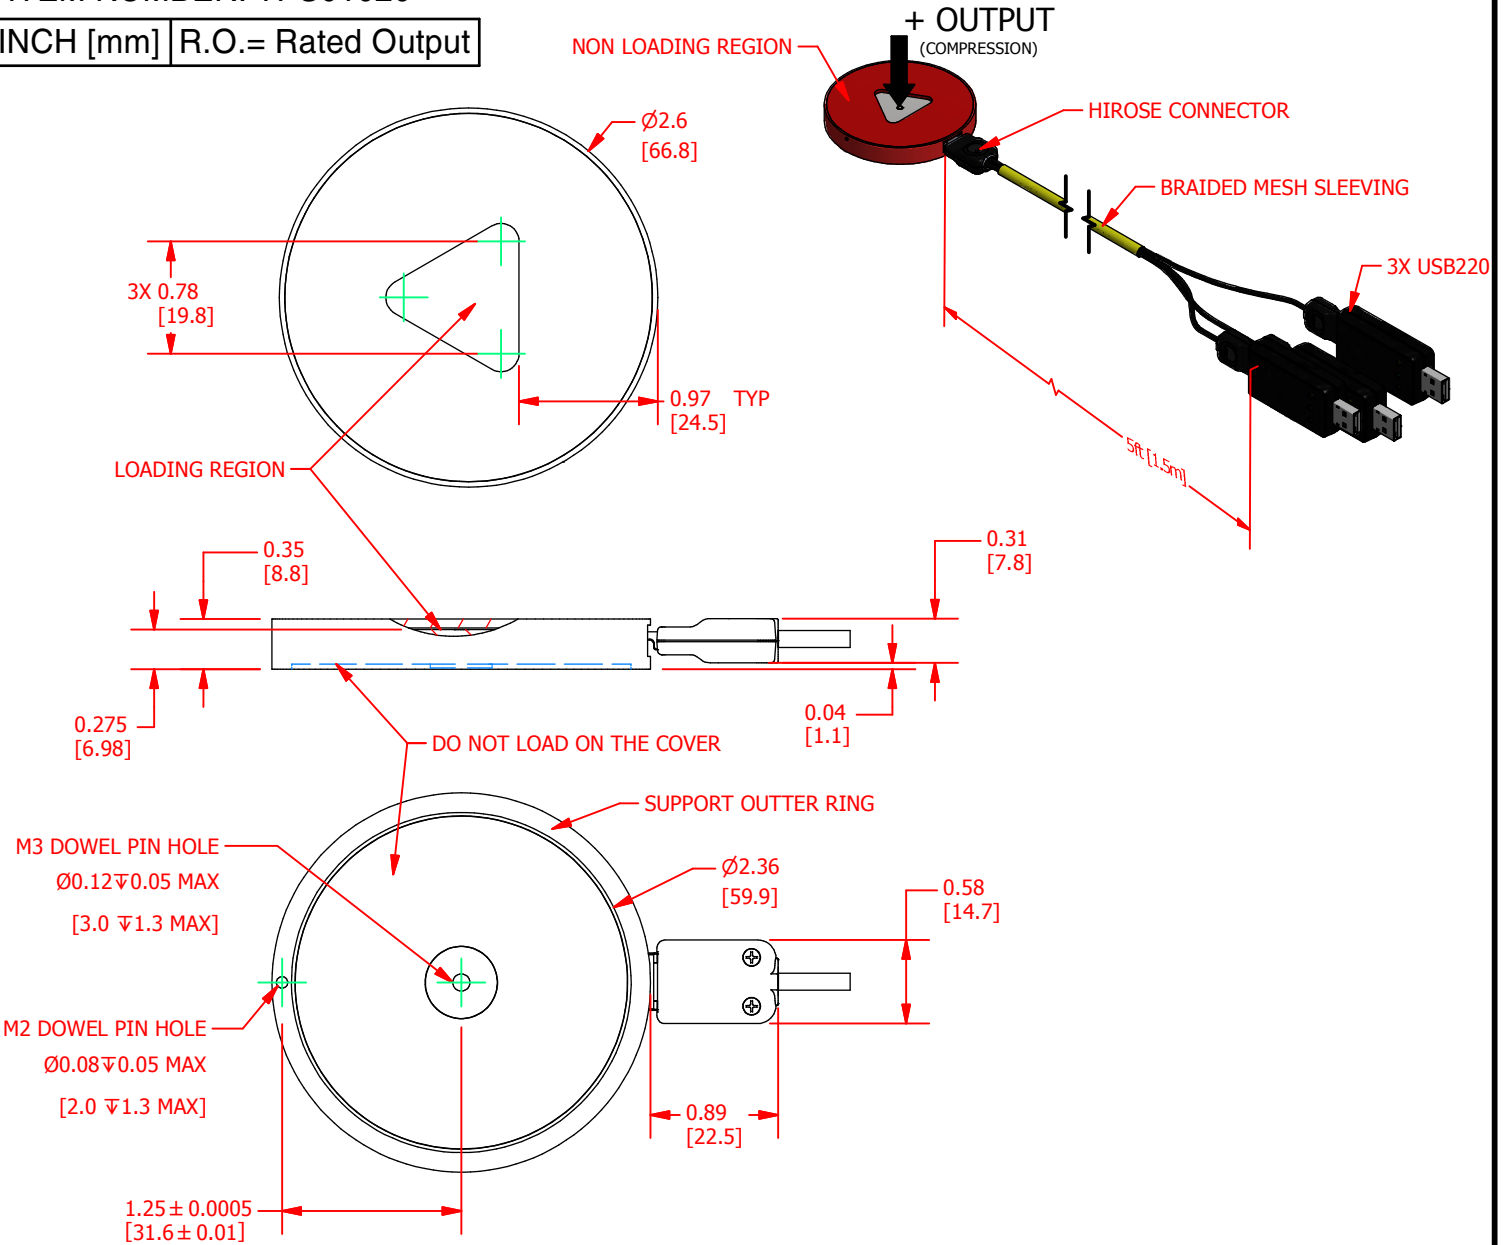

SPECIFICATIONS:

OUTPUT	USB2.0
CAPACITY	1000 g
RESOLUTION	0.01 g
MAXIMUM LOAD	2000 g
WEIGHT (approx)	90 g
MATERIAL	Aluminum
CABLE: 3x 29 AWG Spiral Shielded Silicone, 5 ft [1.5 m] Long	

CUSTOMER APPROVAL- COMPANY:	<h2 style="color: green;">OUTLINE DRAWING</h2>	<p><i>This drawing is submitted solely for the information and exclusive use of the original addressee. It is not to be divulged in whole or in part, by any firm or individual without written permission from:</i></p>	<p>ADVANCED SENSOR TECHNOLOGY, INC. 10 THOMAS, IRVINE, CA 92618 USA Phone: (949) 465-0900 Fax: (949) 465-0905</p>		
CUSTOMER APPROVAL- NAME / DATE:				<p>STANDARD NOTES: (Unless Otherwise Specified)</p> <p>ALL DIMENSIONS ARE IN INCHES DRAWING INTERPRETATION DIMS. PER ASME-Y14.5M REMOVE BURRS AND BREAK SHARP EDGES .005 - .015</p> <p>ANGLE: ± 1/2° CHAMFER: ± 5° TOLERANCE: .X ± 0.1" .XX ± 0.01" .XXX ± 0.005"</p> <p>3rd ANGLE PROJ.</p>	<p>MODEL: QLA383-TPS DWG No.: FO1385</p>
<p>REVISIONS: (Refer to dwg # revision sheet)</p> <table border="1" style="width: 100%; height: 50px;"> <tr> <td style="width: 50px;"> </td> <td> </td> </tr> </table>			<p>THREADS PER HANDBOOK H-28 DIMENSIONS ARE SHOWN AFTER PLATING</p>	<p>APPROVED BY: J. Vargas</p> <p>CHECKED BY: E. Pano</p>	<p>APPROVED DATE: 2/2/2015</p> <p>CAGE: 1X8M6 SHEET: 1 OF 1</p>