


### Extraneous Load Factors

**Equation:**  $\sigma_{max} \geq (A)Fx + (B)Fy + (C)Fz + (D)Mx + (E)My + (F)Mz$

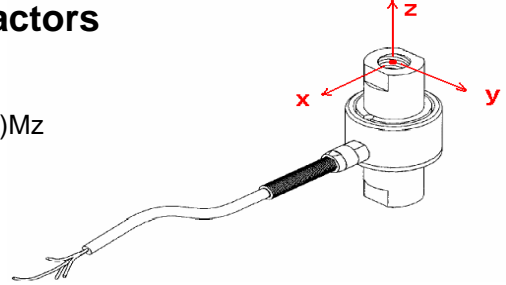

**Material:** 17-4 P.H. Stainless Steel S.S.

Model#	Capacity (lb)	A	B	C	D	E	F
LCF250	2,000	840.99	840.99	30.49	717.81	717.81	606.25
	3,000	511.70	511.70	20.46	446.51	446.51	402.40

$\sigma_{max}$  **Table**

Material	Static Load (=60% Y.S.)	Fatigue (Non Reversing Loads)	Fatigue (Full Reversing Loads)
17-4PH S.S	87,000	78,000	62,000*

\*Value is 75% of Fatigue Strength based on 10-20 x 10<sup>6</sup> cycles and allow for factors that influence Fatigue such as surface finish, stress concentrations, corrosion, temperature and other variables for the production of the transducer, for infinite Fatigue Life (100 x 10<sup>6</sup>) use 75% of values shown.

### Deflection & Natural Frequency

Model#	Capacity (lb)	Deflection (in.)	Natural Frequency (Hz)	$\beta$
LCF250	2,000	0.0010	16,200	0.0718
	3,000	0.0015	18,500	0.0718

\*FN results are based on calculation of deflection & weight scene on Sensor arm.

**Natural Frequency & Frequency Response Equation's:**

$$\text{Natural Frequency (FN)} = 3.13 \sqrt{\frac{1}{\frac{\beta}{\text{Capacity}} \cdot \text{Deflection}}} \text{ (Hz)}$$

$$\text{Frequency Response with load (FR)} = 3.13 \sqrt{\frac{1}{\frac{\beta + \text{AppliedLoad}}{\text{Capacity}} \cdot \text{Deflection}}} \text{ (Hz)}$$

This documentation was generated and completed to the best ability of FUTEK's Engineering Team using FEA Analysis, Empirical data and Multiple Testing Simulations. The information and recommendations on this document are presented in good faith and believed to be correct however, FUTEK Advanced Sensor Technology makes no representations or warranties as to the completeness or accuracy of the information.

\*Where  $\beta$  values are obtained by Futek Engineers